

8.0T/10T Per Column | Wired and Wireless Signal Processing | HMI Screen | CE


**QUICKMULTI**



HDM88 64T

AC Power Supply Available.

**OVERALL DIMENSION**

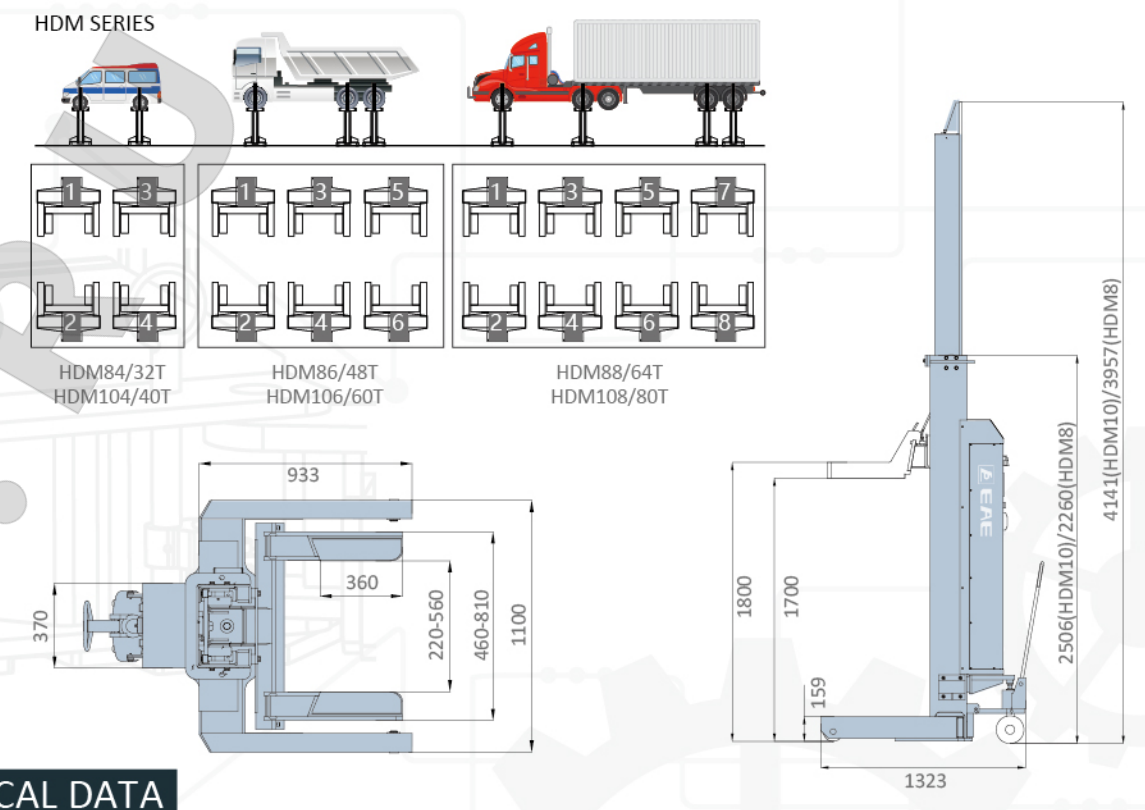

**TECHNICAL DATA**

MODEL NO.	HDM8	HDM10
Lifting capacity	8.0T	10T
Locking release	Electric	Electric
Max. lifting height	1800mm	1800mm
Min. height	159mm	159mm
Full-rise time under rated load	Approx. 85S	Approx. 85S
Motor power	2.2kW	2.2kW
Oil reservoir	14L	14L
Relief Pressure	14Mpa	17Mpa
Approximate Tire Size	500-1250mm	500-1250mm

\* Machine shown with optional equipment. Actual product appearance may differ.



**HDM SERIES**

**HEAVY DUTY MOBILE COLUMN**

- Each column has a maximum lifting capacity of 8.0T/10T.
- A maximum combination of 48 independent columns.
- Wireless and wired signal processing.
- Easier means for setting up the networks and selecting control modes.
- Battery powered, the lifting procedure starts without much work for setting up.
- HMI screen for setting networks, working modes and displaying crucial parameters.
- Tap the ID card to activate and access the control system.
- Audible warning for the final travel of lowering movement.
- The lifting system is battery powered. Each column has a charger rating AC110-240V-1Ph.
- DC24V safe control voltage.
- Adjustable wheel pick-up fork accommodates tire diameter from 500 to 1250mm.

HMI Screen (Optional weight indicator)

Control is only permitted at a authorized column

Wireless communication


Accurate control for synchronization

Adjustable wheel supports accommodate tire diameters from 600mm to 1250mm

Support Stands (Optional)

Crossbeam support and Triangle height extension support (Optional)

Height extension support 200mm and Beam support (Optional)

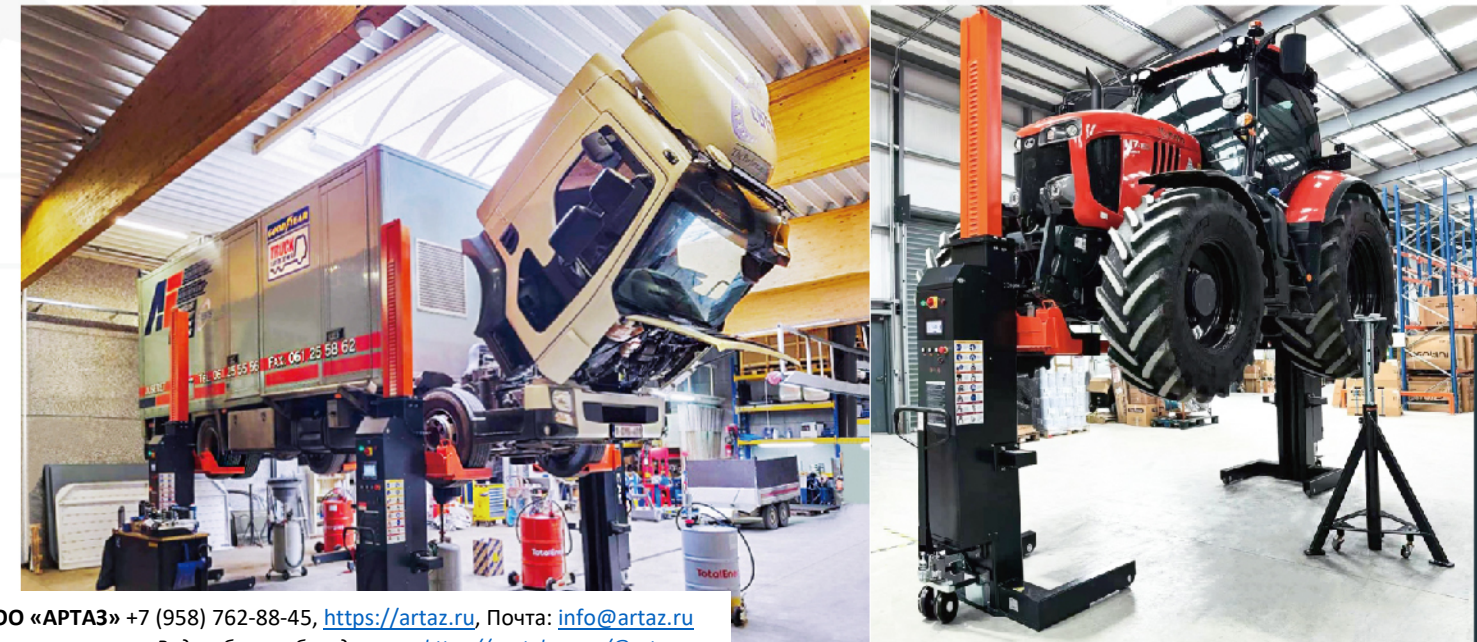

HEAVY DUTY LIFT