

**Battery
charger**
12-24V

CA 225 Automatic




For lead-acid batteries


35 - 225 Ah

 Ref. **024441**

*Fuses x 10 : ref. 054523

- Free loading surveillance by automatic switching on and off
- Protection of the electronic boards
- Allows the load of the battery without disconnecting it to avoid losing in-board parameters
- Optimum protection of the battery
- 2 modes of load : « Automatic » or « Manual »
- Indicator of load by ammeter
- Indicator of the end of the load thanks to a signal
- On / off switch with light indicator
- Short circuit, overload and polarity reversal automatic protections.

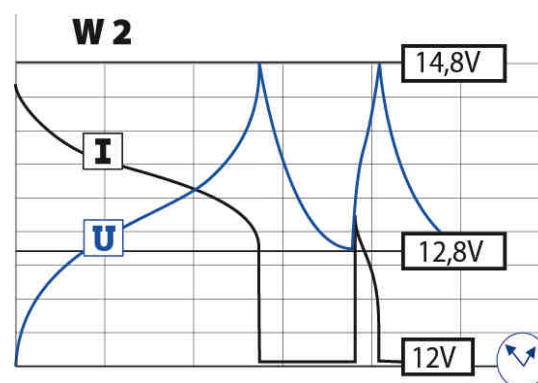

CE EN 60335-2-29

 50/60Hz				EFFICACE /RMS	MOYEN/AVERAGE					
					Reg 1	Reg 2	Reg 3			
230V	700W	12-24V	2	22A	8A	15A	-	30A	36x26x14 cm	9,5 kg