


HEAVY DUTY JACKING BEAMS

JB80-2
JB160-2
JB120-2
JB200-2

Capacity 8 / 12 / 16 / 20 t

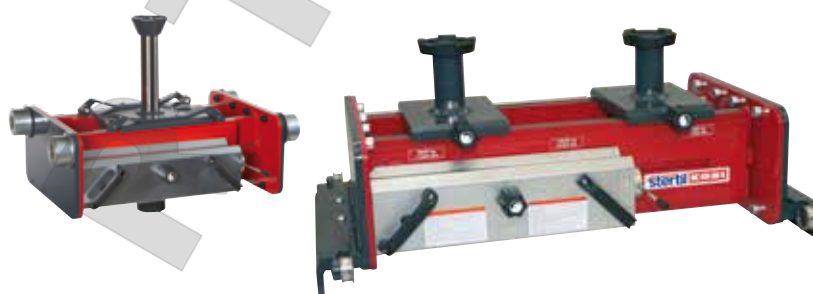

Air hydraulic twin ram jacking beam

- 2 individually controlled rams offer safe and balanced lifting
- Transversely sliding rams
- Rapid and precise air hydraulic unit with high speed ram travel
- Simple modern design with control panel at ergonomic working height
- Can be made to fit all lifts due to its adjustable frame (590 - 890 mm or 850 - 1150 mm)
- Frame height is adjusted and set to the customers individual specifications
- Hold to run release and safety overload valve for optimum safety
- Supplied with 2 x 100mm extensions + 2 x flat adapters
- Also available in single ram version

STERIL
SUPERIOR SOLUTIONS

Options

Diff. beam


For lifting with both rams at one point.



Crossbeam adapter

Capacity 15,0 tons, adjustable 125-750 mm

Total length 902 mm, height 136 mm

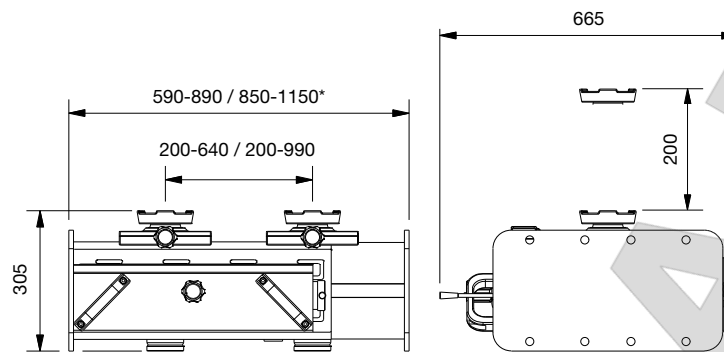

* dimensions excluding support arms

Trolley



Extensions

100 mm, 200 mm



Adapters

U-shape

V-shape



	JB80-2	JB120-2	JB160-2	JB200-2
Capacity	8 t	12 t	16 t	20 t
Stroke	200 mm	200 mm	200 mm	200 mm
Min. height	305 mm	305 mm	305 mm	305 mm
Max. height	505 mm	505 mm	505 mm	505 mm
Width range small frame	590-890	590-890	590-890	590-890
Width range wide frame	850-1150	850-1150	850-1150	850-1150
Depth	665 mm	665 mm	665 mm	665 mm
Lifting points (distance)	200-990 mm	200-990 mm	200-990 mm	200-990 mm
Air supply	8 - 12 bar	8 - 12 bar	8 - 12 bar	8 - 12 bar
Air consumption	350 l/min	350 l/min	350 l/min	350 l/min
Weight	202 kg	202 kg	202 kg	202 kg

* The capacity of the jacking beam cannot exceed 0,66 x the lift capacity

sterdil KONI

a member of the Sterdil Group

Sterdil B.V.
P.O. Box 23
9288 ZG Kootsterille
The Netherlands
Tel. +31(0)512 334444

