



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES


 WASTE OIL
 EQUIPMENTS

GARDA

FEATURES

- SELF-PRIMING
- CONTINUOUS DUTY (AC VERSION)
- THERMAL PROTECTION
- IP65

The PIUSI GARDA pump, suitable for the transfer of water, diesel and oil, consists of a gear pump that ensures greater power during transfer, in the event that the liquid being delivered has a low to medium viscosity. The PIUSI GARDA electric pump is a self-priming device, available both AC and DC versions, with a high degree of suction and is particularly suitable for the transfer of non-corrosive lubricating oils or viscous liquids.

PERFORMANCE

UP TO

10 L/MIN

FLOW RATE

AC/DC

VOLTAGE

POWER



GARDA AC



GARDA DC

PACKAGING


CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
NMT450000A	1,7	3,7	150X120X105	5,9X4,7X4,1	-	1
NMT450001A	1,7	3,7	150X120X105	5,9X4,7X4,1	-	1
NMT450002A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT450003A	2,7	5,9	150X120X105	5,9X4,7X4,1	-	1
NMT460000A	2,8	6,2	360X130X102	14,2X7,3X4	-	1
NMT460001A	2,8	6,2	360X130X102	14,2X7,3X4	-	1
NMT450006	6	13,2	360X130X102	14,2X7,3X4	-	1



CHART

IN THE BOX

- GARDA PUMP
- INSTRUCTION MANUAL

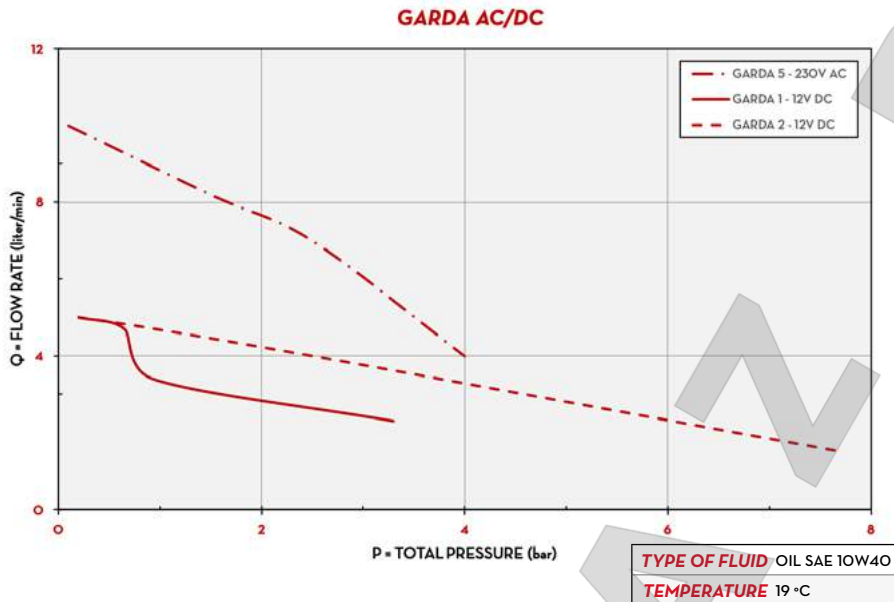


DETAILS



DIMENSIONS

MATERIALS

- BODY: CAST IRON
- SHAFT: STEEL
- GEARS: BRONZE

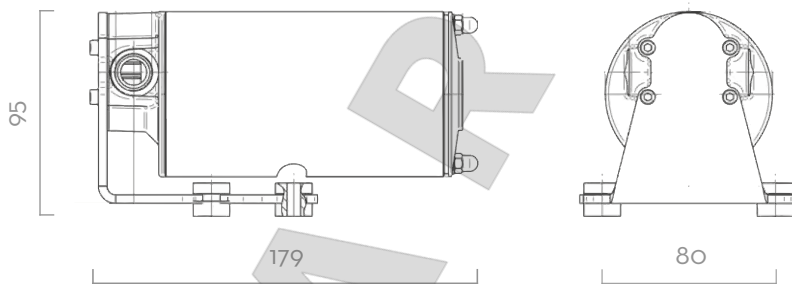

Dimensions expressed in millimeters

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		VOLTS/HZ	MAX DRAW	FUSE	PORTS
			L/MIN	GPM	BAR	PSI				
NMT450000A	GARDA 1 12V		8	2,1	1,5	22	12	12 A	-	3/8"
NMT450001A	GARDA 1 24V		8	2,1	1,5	22	24	6 A	-	3/8"
NMT450002A	GARDA 2 12V		10	2,6	3,5	50	12	19 A	-	3/8"
NMT450003A	GARDA 2 24V		10	2,6	3,5	50	24	10 A	-	3/8"
NMT460000A	GARDA 2 12V W/WITCH 2MT CABLE		10	2,6	3,5	50	12	19 A	25 A	3/8"
NMT460001A	GARDA 2 24V W/WITCH 2MT CABLE		10	2,6	3,5	50	24	10 A	15 A	3/8"
NMT450006	GARDA 5 230V/50HZ		10	2,6	3,5	50	230/50	1,8 A	1,8 A	3/8"