





# Diesel Automatic Nozzle 80 l/min

FLO MASTER®

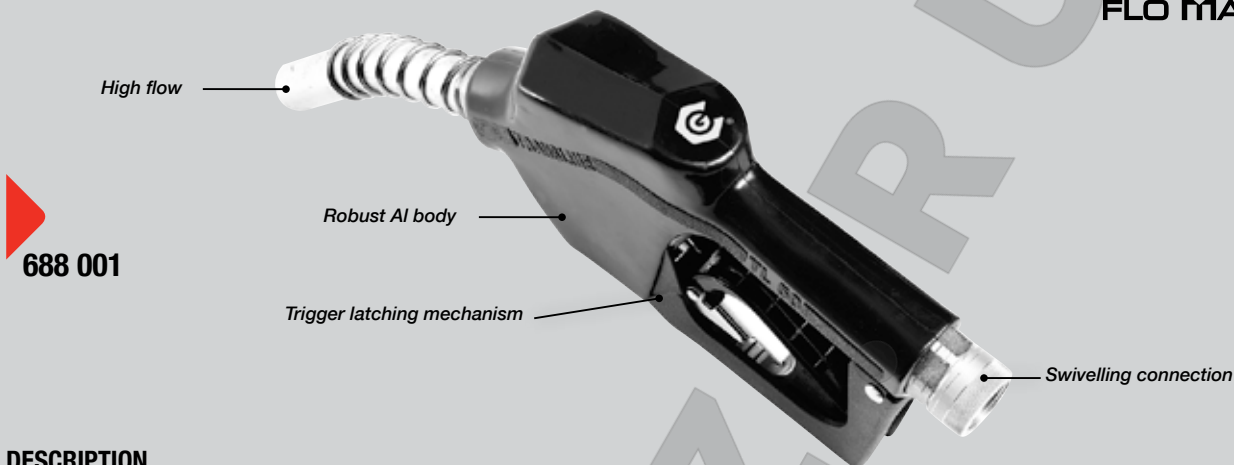

## DESCRIPTION

Aluminium automatic nozzle designed for delivering diesel. It is light, robust and includes a trigger latching mechanism to ease fluid delivery at different flow rates and an aluminium swivel to 1" BSP F to allow an easy hose connection.

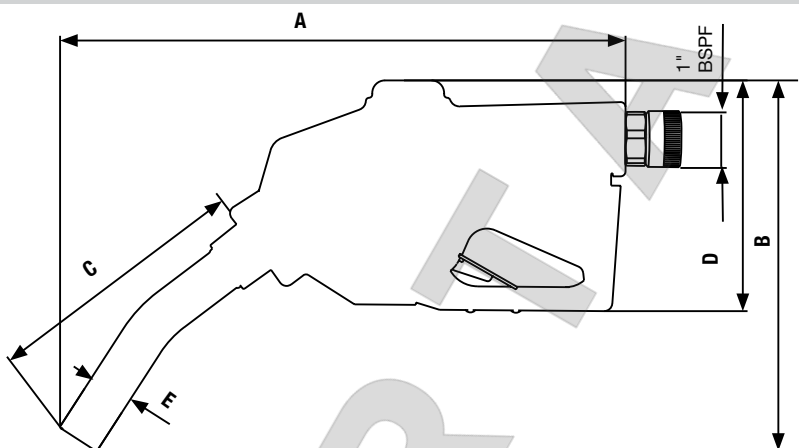

A	B	C	D	E
359 mm (14.1")	234 mm (9.2")	171,5 mm (6.7")	146 mm (5.7")	Ø28 mm 1.1")

TECHNICAL SPECIFICATIONS	
PART No.	688 001
MAX. FLOW RATE	100 l/min (26 gal/min)
MAX. WORKING PRESSURE	3 bar (43.5 psi)
WEIGHT (APPROX)	1.6 kg (3.5 pounds)
MINIMUM FLOW RATE REQUIRED FOR AUTOMATIC SHUT-OFF	12 l/min (3 gal/min)
WETTED PARTS	Aluminium, Stainless steel, Viton®, NBR
SPARE PARTS / ACCESSORIES	

364 030



Aluminium swivel fitting 1" BSP M-1" BSP F

